

AquaFlow

Unvented single coil water cylinder

RANGE 150 - 200 - 250

WRAS APPROVED

ANTI CORROSION

HIGH PERFORMANCE

25 YEAR WARRANTY ON INNER TANK





AquaFlow

Unvented single coil water cylinder







APPROVED

FOR USE WITH MYNUTE VHE. MYNUTE I AND VISION S

For use with Vokèra Mynute VHE open vent boiler, Vision S and Mynute i

Inner tank guaranteed for 25 years, made from stainless steel.⁽¹⁾

2 year warranty on ancillary components.(1)

High performance mains pressure to all hot water outlets.

Up to 50 litres per minute flow rate.

WRAS Approved.

No need for 'sacrificial anode' due to excellent anti-corrosion properties of stainless steel.

Compact dimensions.


TPRV, EV, Tundish, 2-port motorised valve supplied as standard.

3kW immersion heater and energy cut-out device supplied as standard.

Optional secondary return connection if required.

Thermal insulation and energy efficient coil meet Part L Requirements.

(1) Subject to registration.

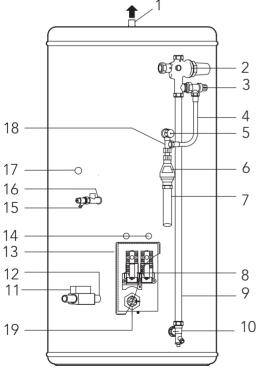

- Hot water outlet
- Pressure reducing valve
- Expansion/check valve Flexible connection
- TPR valve
- Tundish
- Discharge pipe
- Cylinder thermostat
- 9. Cold feed tube
- 10. Drain cock

- 11. Motorised valve
- 12. Flow connection
- 13. Junction box
- 14. Cable Entry
- 15. Commissioning drain valve
- 16. Secondary return
- 17. Return connection
- 18. Tee Piece
- 19. Immersion Element

SPECIFICATIONS	AquaFlow 150	AquaFlow 200	AquaFlow 250
Product order code	863	864	865
Capacity	150 litres	200 litres	250 litres
Height	900mm	1150mm	1400mm
Depth (diameter)	580mm	580mm	580mm
Weight (when full)	190kg	240kg	300kg
Coil rating	12kW	26.5kW	26.5kW
Average recovery time	30 min	26 min	28 min
Energy loss (kW/day)	1.78	2.04	2.45
Maximum working pressure	8-bar	8-bar	8-bar
ErP water heating efficiency			
(XL profile) (class/%)	B/tbc	C/tbc	C/tbc

Registered Address: Vokèra Ltd Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

Email: enquiries@vokera.co.uk Web: www.vokera.co.uk Vokèra Ireland West Court, Callan, Co Kilkenny, R95 PW40 Tel: 0844 391 0999 Tel: 056 775 5057

Fax: 0844 391 0998 Fax: 056 775 5060





