

Vision

High efficiency combi and system boiler

VISION COMBI 25C - 30C
AND SYSTEM 20S - 25S

5 OR 7 YEAR WARRANTY
OPTION AVAILABLE⁽¹⁾


BUILT IN FILLING LOOP⁽²⁾

REAR FLUE OPTION

BUILT IN 7 DAY
DIGITAL CLOCK⁽²⁾

LIGHTWEIGHT WITH
COMPACT DIMENSIONS

BUILT IN ON-BOARD RELAY⁽³⁾

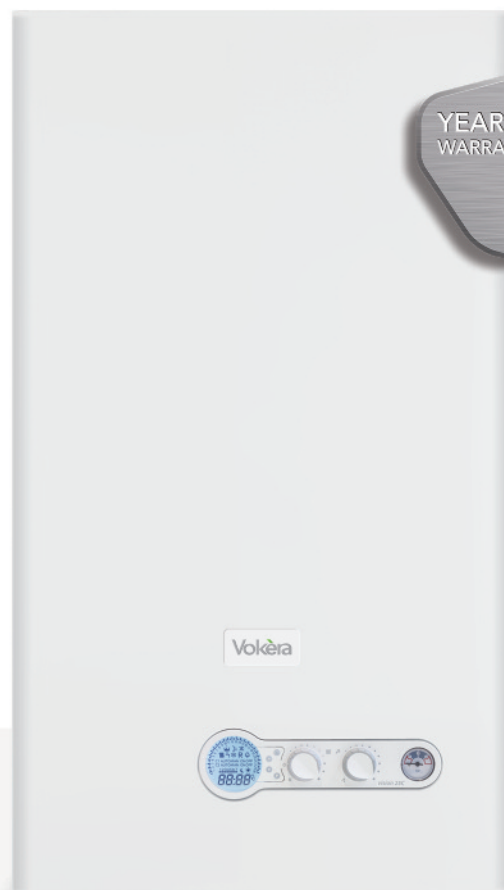

⁽¹⁾7 year warranty option available for a promotional period.
⁽²⁾Vision C only. ⁽³⁾Vision S only.

ErP
2015 COMPLIANT

Vision

High efficiency combi and system boiler range

SPECIFICATIONS	Vision 25C	Vision 30C	Vision 20S	Vision 25S
Product order code - 5 year	20097278	20099224	20099228	20099229
Product order code - 7 year	29450501	29450502	29450503	29450504
Central Heating				
Heat input (kW)	20	25	20	25
Maximum heat output 60/80°C (kW)	19.5	24.5	19.5	24.5
Maximum heat output 30/50°C (kW)	20.8	26.2	20.8	26.2
Domestic Hot Water				
Heat input (kW)	25	29	-	-
Flow Rate - 35°C rise (l/min)	10.2	12	-	-
Dimensions				
HxWxD (mm)	715 x 405 x 248			
Weight				
Dry weight (kg)	27	28	26	27
Connections				
Flow & return	22mm	22mm	22mm	22mm
Gas	15mm	15mm	15mm	15mm
DHW inlet & outlet	15mm	15mm	15mm	15mm
Safety valve	15mm	15mm	15mm	15mm
Electrical				
Voltage (V/Hz)	230/50	230/50	230/50	230/50
Flue Details (concentric)				
Max horizontal flue length (60/100mm)	5.85m	4.85m	5.85m	4.85m
Max vertical flue length (60/100mm)	6.85m	5.85m	6.85m	5.85m
Max horizontal flue length (80/125mm)	15.3m	12.8m	15.3m	12.8m
Max vertical flue length (80/125mm)	20.3m	17.8m	16.3m	13.8m
Flue Details (twin)				
Max horizontal / vertical flue length (80mm/80mm)	45m/45m	40m/40m	45m/45m	40m/40m
Efficiency				
ErP seasonal space heating energy efficiency (class/%)	A/93	A/93	A/93	A/93
ErP water heating efficiency (XL profile) (class/%)	A/85	A/84	-	-
SAP 2009 efficiency (%)	89.1	89.0	89.0	89.1
NOx Class	5	5	5	5

ENERGY SAVING CONTROLS AND OPTIONS

Description	Code
Rear flue terminal	29450133
Pipe cover	20012594
RF Room thermostat control	20059642
OpenTherm RF programmable room thermostat ⁽⁴⁾	20050690
Weather compensation sensor ⁽⁴⁾	2359259
Spacing frame	20030704
Magnetic filter	29450199
Fuelsaver	29450000

⁽¹⁾The addition of an energy saving control will override the built-in digital control settings on the Vision Combi. For Vision System boilers please contact Vokèra technical for advice, controls heat only. ⁽²⁾Subject to registration and annual service, 7 year warranty offer valid for a promotional period, terms and conditions apply. ⁽³⁾Autostop activation device required.

Registered Address: Vokèra Ltd Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

Email: enquiries@vokera.co.uk Web: www.vokera.co.uk

Tel: 0844 391 0999

Fax: 0844 391 0998

Vokèra Ireland West Court, Callan, Co Kilkenny, R95 PW40

Tel: 056 775 5057

Fax: 056 775 5060




Search Vokera Ltd

Vokèra Limited reserve the right to change specification without prior notice. Consumers statutory rights are not affected. E&OE

Company Reg No: 1047779

Issue 08/2015/NP



Fully compliant with the Energy-related Products Directive. Further efficiency can be achieved when installed with a weather compensation sensor or OpenTherm control.⁽¹⁾

5 or 7 year parts and labour warranty.⁽²⁾

Simple to use built-in 7 day digital clock with three modes of operation and back-lit LCD display enables full control of heating times over a seven day period, maximising control and saving energy.

Flow rate of up to 12 l/min results in quick delivery of hot water.

DHW pre-heat function that is easily activated by the end-user.

Small dimensions enable the boiler to be sited almost anywhere in the home, including within a kitchen cupboard.

Rear flue option as well as the standard top flue option provides a versatile installation. Other flueing options available are; horizontal, vertical and twin flue.

Lightweight at only 27kg for the 25C enables the boiler to be lifted into place easily, even in tight spaces.

Designed for easy installation. Standard Vokèra pipework layout enables trouble-free replacement of older Vokèra models.

Standard Autostop disabling function⁽³⁾ that automatically changes the current operating mode and moves it permanently into the standby mode, helping Registered Social Landlords fulfill their legal obligation of an annual gas safety check.

Simple commissioning; only minimal adjustments are required after installation and automatic modulation eliminates the need to range rate the boiler.

Additional built-in functions include: SARA function for automatic temperature control and improved efficiency, anti-cycling for longer lasting component performance, frost protection and CO mode for simple servicing.

If the boiler is to be installed in a location that is difficult to access then Vokèra's optional RF room thermostat control can be installed in a convenient location so the heating temperature can easily be adjusted.

Anti-cycling control prevents wasteful on/off cycling reduces wear and tear for longer lasting component performance.

Low NOx - Class 5 performance. Only 19mg/kWh for 25C provides maximum credits available for a condensing boiler under the Code for Sustainable Homes.

Compatible with Vokèra Fuelsaver passive flue gas heat recovery device which is listed on the PCDB and validated for SAP 2009.