

AquaNova

Instantaneous
multipoint
water heater



ErP CLASS A ■

2 YEAR WARRANTY ■

SIMPLE INSTALLATION ■

FLEXIBLE FLUEING ■


ELECTRONIC IGNITION ■

AquaNova

Instantaneous multipoint water heater

Dimensions and Clearances (mm)

*From casing or 25mm above flue
elbow (whichever is applicable)

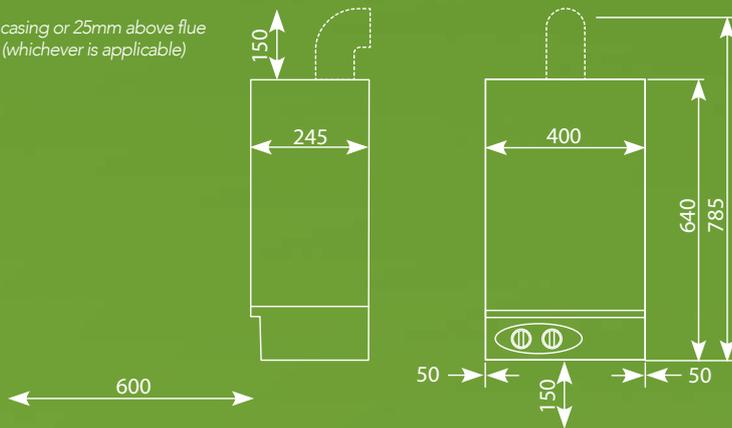

- Fully compliant with the Energy-related Products Directive.
- Suitable for domestic and small light commercial applications.
- 2 year warranty.⁽¹⁾
- Provides instant hot water to multiple outlets, such as to a kitchen and bathroom.
- Ideal for replacement installations for properties that require hot water supply only.
- AquaNova has a 28kW heat output and high flow rate of 11.8 l/min.
- Simple installation and commissioning. All connections are easily accessible and the appliance is supplied with a built-in fly lead.
- Continuous gas modulation and electronic temperature sensing gives accurate temperature control.
- AquaNova can be flued horizontally or vertically using Vokera's concentric Uni flue or twin flue systems.
- Simple to service. No diaphragm or water section. This reduces maintenance requirements.
- Electronic ignition eliminates the need for a constantly running fan or energy wasteful pilot light.

⁽¹⁾Subject to registration and annual service.



ErP Compliant



2 Year Warranty⁽¹⁾



Instant
Hot Water



High Flow Rate

GET IN TOUCH

Vokera Limited, Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

E: enquiries@vokera.co.uk

W: www.vokera.co.uk

T: 0844 391 0999

F: 0844 391 0998

SPECIFICATIONS	AQUANOVA
PRODUCT ORDER CODE (NATURAL GAS)	20109286
PRODUCT ORDER CODE (LPG)	20109287
DOMESTIC HOT WATER	
MAXIMUM HEAT INPUT (kW)	28.8
FLOW RATE - 35°C RISE (L/MIN)	11.8
DIMENSIONS	
HEIGHT (MM)	640
WIDTH (MM)	400
DEPTH (MM)	245
WEIGHT	
DRY WEIGHT (KG)	20
EFFICIENCY	
ERP WATER HEATING EFFICIENCY (XL PROFILE) (CLASS/%)	A/80.1

FLUE LENGTHS	AQUANOVA
FLUE DETAILS (CONCENTRIC)	
MAX HORIZONTAL FLUE LENGTH (60/100MM)	2.4M
MAX VERTICAL FLUE LENGTH (60/100MM)	3.6M
FLUE DETAILS (TWIN PIPES)	
MAX HORIZONTAL FLUE LENGTH (80MM/80MM)	5M/5M + TERMINAL
MAX VERTICAL FLUE LENGTH (80MM/80MM)	5M/5M + TERMINAL

WE ARE SOCIAL

